


## Southern Freight Link

### Community Notification – Construction work, Casula to Glenfield

The Southern Sydney Freight Line Project (SSFL) will be undertaking construction work in your area. These works must be undertaken outside normal construction because there are safety risks involved with working in close proximity to the overhead wires and tracks. RailCorp has a track possession scheduled from **18 to 19 February 2012**, which means passenger trains won't be running on this weekend to allow construction work on the train lines. The Southern Sydney Freight Line will utilise this track possession to undertake work safely.

#### Casula Station

Installing a throw screen to the pedestrian bridge and stairs, and platform works will be undertaken from **7am to 6pm Saturday 18, and from 8am to 6pm Sunday 19 February 2012**. A contingency is in place from **6pm to 10pm on Saturday 18 and Sunday 19 February 2012**. The equipment required for these works will include a 20t Franna crane, delivery vehicles, knuckle boom, generator, concrete pump, concrete saw, oxy cutting set, and powered and non-powered hand tools.

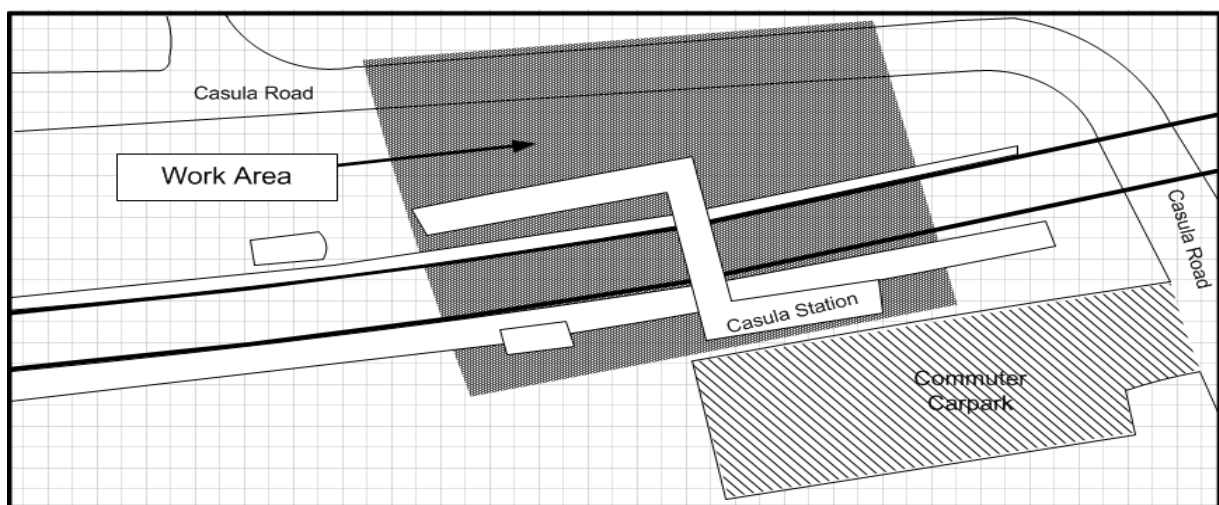

#### Casula to Glenfield

Work will be undertaken from Casula to Glenfield in three areas as depicted in the area over the page from **7am to 6pm Saturday 18, and 8am to 6pm Sunday 19 February 2012**.

**Area A** Installing environmental controls, undertaking earthworks for temporary access roads, potholing, and constructing a haulage route for plant and equipment will be undertaken. The equipment that will be used

include an excavator, 8t roller, two pothole trucks, two concrete trucks, two truck and dogs, and powered and non-powered hand tools.

**Area B** Installing environmental controls, excavating, backfilling, compacting, piling and piling platforms, concreting, and potholing will be undertaken. The equipment that will be used include two excavators, two cranes, two bobcats, 8t roller, one piling rig, one truck mounted piling rig, two pothole trucks, two concrete trucks, two concrete pumps, three lighting towers, hi-rail truck, hi-rail Manitou crane, hi-rail scissor lift, hi-rail excavator, two truck and dogs, elevated work platform, and powered and non-powered hand tools.

Temporary hoarding will also be erected in Area B from **6pm to 10pm on Saturday 18 February**. A contingency is in place from **10pm Saturday 18 to 8am Sunday 19 February 2012**. The equipment required to erect the hoarding will include an elevated work platform, backhoe, generator, lighting towers, and powered and non-powered hand tools.

**Area C** Installing environmental controls, excavating, backfilling, compacting, piling and piling platforms, concreting, and potholing will be undertaken. The equipment that will be used include a two excavators, 6t roller, piling rig, truck mounted piling rig, two pothole trucks, two concrete trucks, two truck and dogs, and powered and non-powered hand tools. A contingency is in place to complete the works in Areas A, B and C from **6pm to 10pm on Sunday 19 February 2012**.



We appreciate your patience while we build this important project for Sydney and NSW.

For further information please phone our 24 Hour Information Line on 1800 182 543 or email [ssfl@artc.com.au](mailto:ssfl@artc.com.au) or visit [www.ssfl.artc.com.au](http://www.ssfl.artc.com.au)



Translating & Interpreting Service (TIS)– Please Phone: 131 450